

AD-15-H-100-022


Evaporative cooler with side air outlet



	DESCRIPTION	UNITS	DATA
AIR FLOW	Air flow	m ³ /h	13.511
	Available static pressure	Pa	107
ENGINE	Rated power	kW	2,20
	Nominal consumption	A	4,47 A (400V III) 8,14 A (220V III)
	Speeds	Units	1 speed / frequency inverter
	Tension	V/Phases/Hz	400/III/50 Hz
	Regulation type	-	1 speed / frequency inverter
FAN	Typo	-	Centrifuge
	Diameter	mm	-
	Speed	Rpm	548 (PM-106 PV-280)
	Drive belts	Units	1 x XPZ 1650
PUMP	Model	-	EBM ALPHA 45/15
	Power / Nominal consumption	-	50 W / 0,17 A
	Flow (2m height)	l/m	25
	Tension	V/Phases/Hz	230/I/50
	Level switch	-	Optional
COOLING	Panel type	-	5090
	Dimensions	mm	790x900x100
	Quantity	Units	3
	Total panel surface	m ²	2,13
	Panel air speed	m/s	1,76
	Panel efficiency	%	86
	Temperature impulsión (40°C – 30% HR)	°C	27,2 °C
	Pre filter G4	-	Optional
SOUND LEVEL	Sound level	dB (A) 3m	66
CONNECTIONS	Inlet solenoid valve	Inches	½"
	Water evacuation	Inches	1 ¼"
	Overflow	Inches	1"
CLEANING SYSTEM	Automatic emptying	-	Yes
	UV lamp	-	Optional
CONTROL TYPE	Electric panel 1 speed	-	Optional
	Electric panel with frequency inverter	-	Optional
DIMENSIONS	Overall dimensions	Width/Length/Height	1135x1163x1270mm
	Mouthpiece connexion dimensions	Width/length	560x485mm
	Empty weight / operating	Kg	184 / 204
CERTIFICATES			CE

AD-15-H-100-022

Evaporative cooler with side air outlet

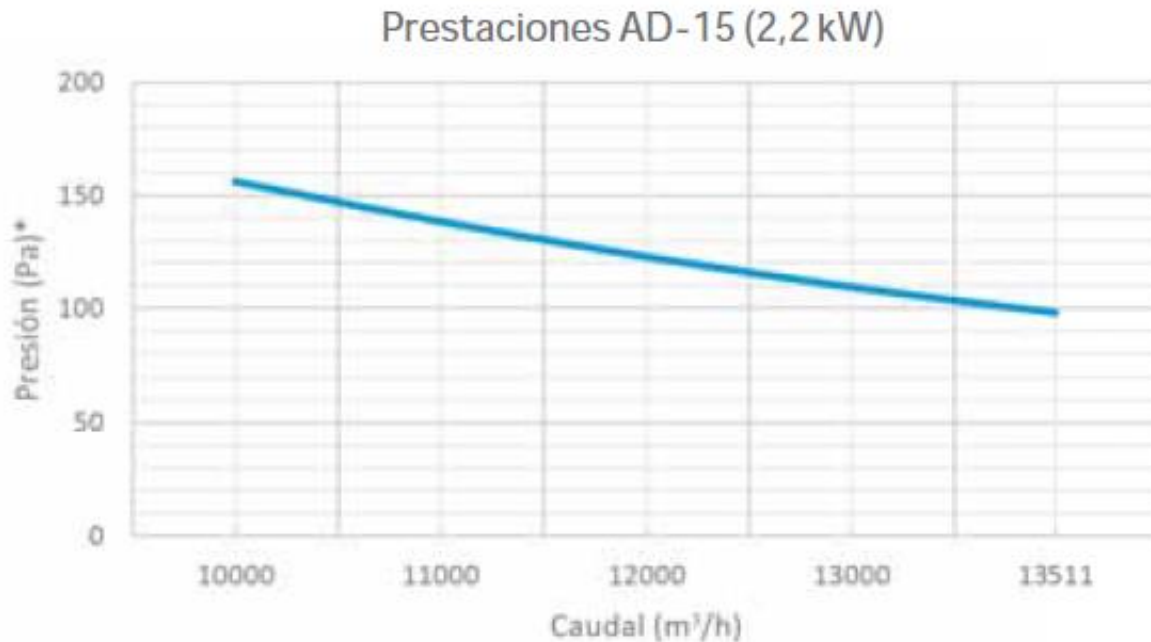

Standard design details

- Water tray made of polyamide
- Corner and central posts in stainless steel AISI-304
- Upper roof made of polyamide
- Inlet and outlet side grids in galvanised steel with polyester powder coating (INOX version in AISI-304)
- Cooling panels type 5090 of 100mm thick
- Galvanised steel centrifugal fan unit
- Automatic draining system patented by MET MANN
- SCHAEFFLER CORROTECT corrosion-resistant bearings with protective caps
- Maintenance-free QUAD-POWER4 power transmission belts from GATES
- EBM ALPHA 45/15 EBM water pump with external rotor motor
- High efficiency electric motor IE3 IP 55
- Normally closed inlet solenoid valve
- Half-turn opening system for access to the inside of the unit
- Base stand with legs supplied as standard for ease of transport and installation

Custom manufacturing


- Air filtration to comply with BRC food standards
- Customized air flows and pressures
- ATEX motors for explosive environments, etc..

AD-15-H-100-022

Evaporative cooler with side air outlet



Wall installation with diffuser

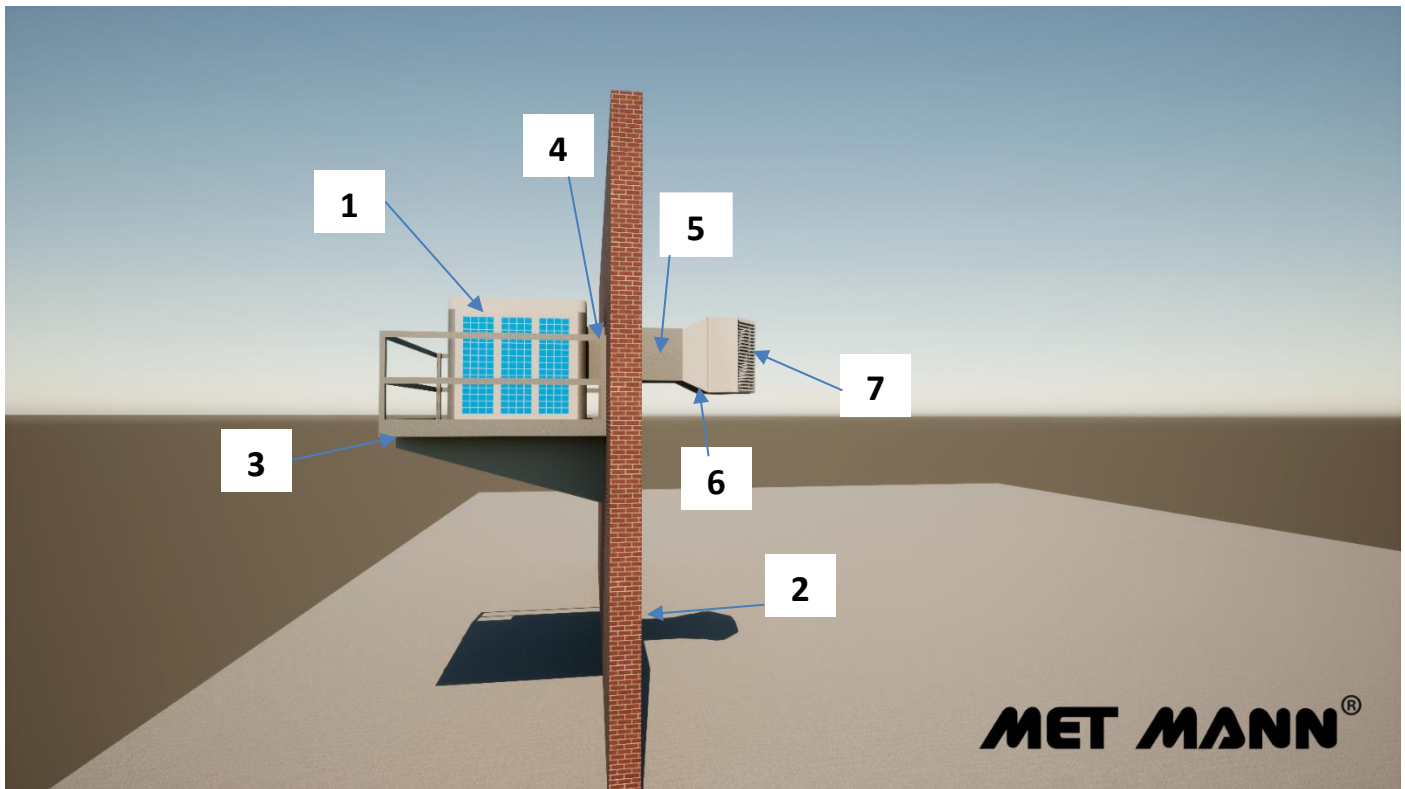


POSITION	DESCRIPTION	UNITS	STANDARD	INOX
01	Evaporative cooler AD-15-H-100-022	1	15011541022S	15011541022I
02	Electric panel 1 speed / frequency inverter	1	0415CMS022400	0415CF022400
03	Base stand support KBM-15	1	03091501024	
04	Flexible joint JE-600 (600x600)	1	1805AV6060	
05	Straight section TR-600 (600x600x1000)	1	1805TR600	
06	Coupling (564x486/600x600)	1	180547406060	
07	3-way air diffuser DCH-3-15	1	0323150115301	
-	Pre filter PG4-15	3	04150115G412	04150115G412I
-	UV WATER treatment	1	031501101010M	
-	Protective case FU-15-H	1	03021502009H	

AD-15-H-100-022

Evaporative cooler with side air outlet



Wall installation with impulsion nozzles

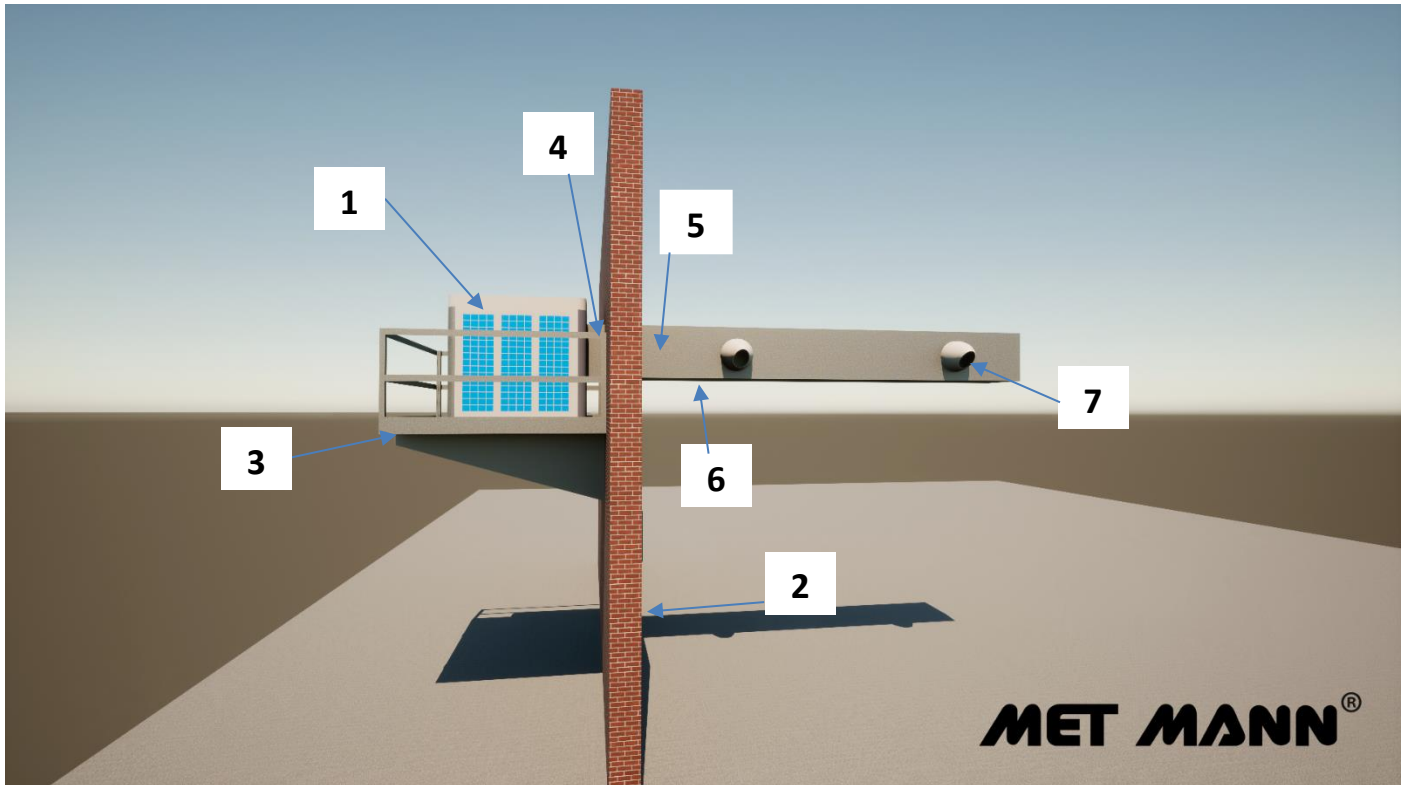

POSITION	DESCRIPTION	UNITS	STANDARD	INOX
01	Evaporative cooler AD-15-H-100-022	1	15011541022S	15011541022I
02	Electric panel 1 speed / frequency inverter	1	0415CMS022400	0415CF022400
03	Base stand support KBM-15	1	03091501024	
04	Coupling (564x486/600x600)	1	180547406060	
05	Flexible joint JE-600 (600x600)	1	1805AV6060	
06	Straight section TR-600 (600x600x1000)	1	1805TR600	
07	High induction nozzles CI-300	10	04150PAKCONO	
-	Pre filter PG4-15	3	04150115G412	04150115G412I
-	UV WATER treatment	1	031501101010M	
-	Protective case FU-15-H	1	03021502009H	